

**DESCRIPTION**


- ELECTRONIC BALLAST
- ELECTRONIC TRANSFORMER
- SWITCH MODE POWER SUPPLY

**FEATURES:**

- LOW THERMAL RESISTANCE
- HIGH INPUT RESISTANCE
- FAST SWITCHING
- ROHS COMPLIANT

**MAXIMUM RATINGS (T<sub>c</sub>=25°C)**

PARAMETER	SYMBOL	VALUE	UNIT
Drain-source Voltage	VDS	500	V
gate-source Voltage	VGS	±30	V
Continuous Drain Current (T <sub>C</sub> =25°C)	ID	24	A
Drain Current-Pulsed	IDM	70	A
Total Dissipation	PD	150	W
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	-55-150	°C
Single Pulse Avalanche Energy (I <sub>AS</sub> =24A)	EAS	485	mJ

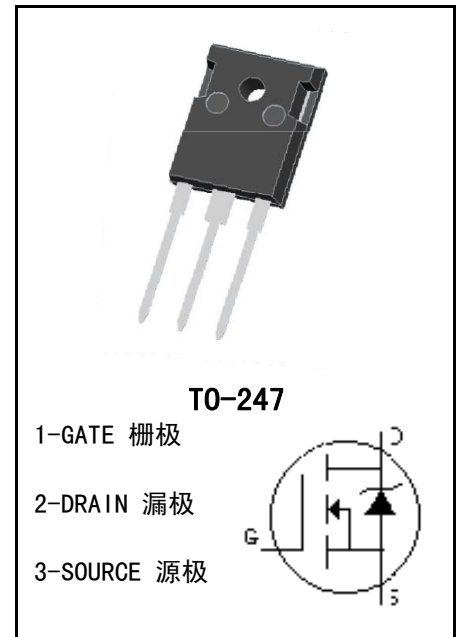**MECHANICAL**

**ELECTRONIC CHARACTERISTICS (T<sub>c</sub>=25°C)**

CHARACTERISTICS	SYMBOL	TEST CONDITION	MIN	MAX	UNIT
Drain-source Breakdown Voltage	BVDSS	VGS=0V, ID=250uA	500		V
Gate Threshold Voltage	VGS (TH)	VGS=VDS, ID=250 μ A	2.5	4.5	V
Drain-source Leakage Current	IDSS	VDS=500V, VGS=0V		1	uA
Drain-Source Diode Forward Voltage	VSD	VGS=0V, IS=12A		1.5	V
Gate-body Leakage Current (VDS = 0)	IGSS	VGS=±30V		±0.1	uA
Forward Transconductance	gfs	Vds=10V Id=12A	8		S
Static Drain-source On Resistance	RDS (ON)	VGS=10V, ID=12A		140	mΩ
Thermal Resistance Junction-case	RthJ-c			0.9	°C/W

**■ DYNAMIC CHARACTERISTICS (T<sub>c</sub>=25°C)**

CHARACTERISTICS	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Input Capacitance	C <sub>iss</sub>	V <sub>DS</sub> =25V, V <sub>GS</sub> =0V, f=1.0MHZ	-	1440	-	pF
output Capacitance	C <sub>oss</sub>		-	370	-	pF
Reverse Transfer Capacitance	C <sub>rss</sub>		-	11	-	pF

**■ SWITCHING CHARACTERISTICS (T<sub>c</sub>=25°C)**


CHARACTERISTICS	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Turn-On Delay Time	t <sub>d(on)</sub>	V <sub>DD</sub> =400V, I <sub>D</sub> =12A, R <sub>G</sub> =20Ω, V <sub>GS</sub> =10V	-	15	-	ns
Turn-On Rise Time	t <sub>r</sub>		-	11	-	ns
Turn-Off Delay Time	t <sub>d(off)</sub>		-	110	-	ns
Turn-Off Rise Time	t <sub>f</sub>		-	9	-	ns
Total Gate Charge	Q <sub>g</sub>	V <sub>DS</sub> =400V, I <sub>D</sub> =12A, V <sub>GS</sub> =10V	-	70	90	nC
Gate-Source Charge	Q <sub>gs</sub>		-	7.8	-	nC
Gate-Drain Charge	Q <sub>gd</sub>		-	9	-	nC

**■ DRAIN-SOURCE DIODE MAXIMUM RATINGS AND CHARACTERISTICS (T<sub>c</sub>=25°C)**


CHARACTERISTICS	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Max. Diode Forward Current	I <sub>s</sub>		-	-	24	A
Max. Pulsed Forward Current	I <sub>SM</sub>		-	-	70	A
Diode Forward Voltage	V <sub>SD</sub>	V <sub>GS</sub> =0V, I <sub>S</sub> =12A	-	-	1.5	V
Reverse Recovery Time	t <sub>rr</sub>	V <sub>GS</sub> =0V, I <sub>S</sub> =12A, dI <sub>F</sub> /dt=100A/μs,	-	475	-	ns
Reverse Recovery Charge	Q <sub>rr</sub>		-	5.8	-	μC




CHARACTERISTICS CURVE

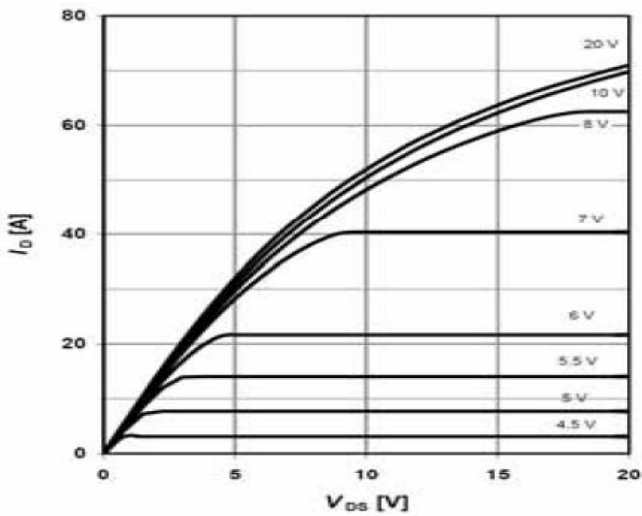


Output Characteristic

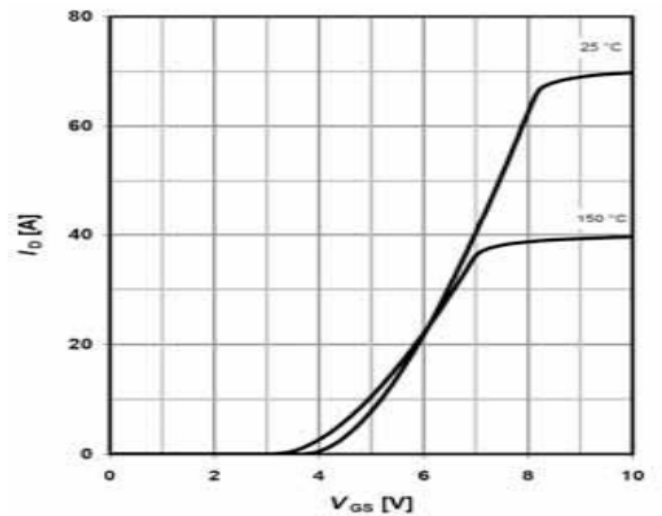


Transfer Characteristic

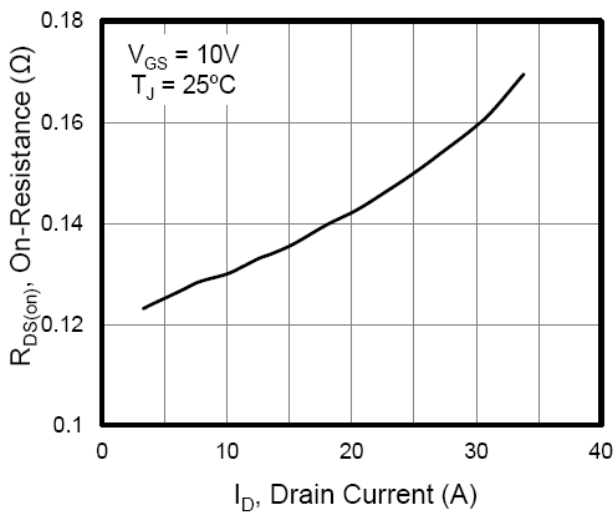


On Resistance Vs Drain Current

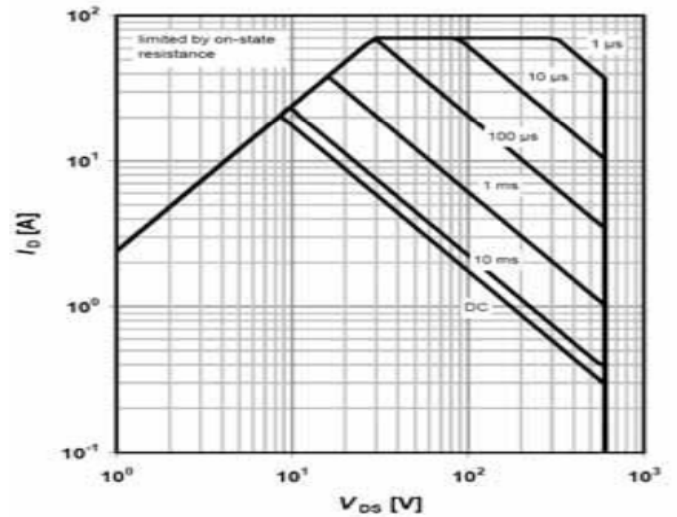

Safe Operating Area

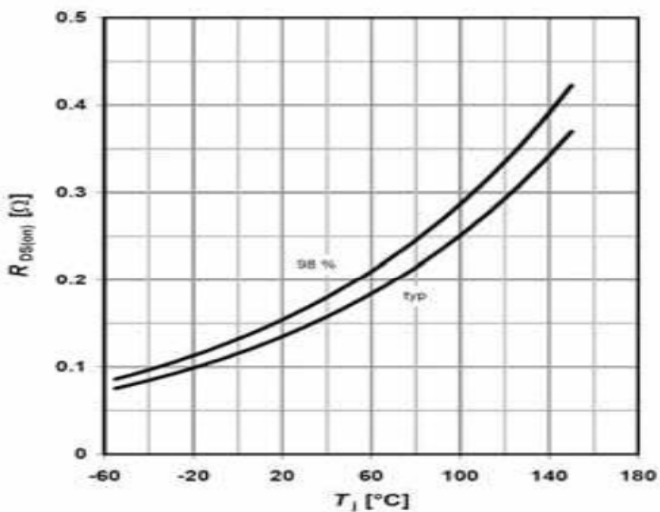


On Resistance Vs Junction Temperature

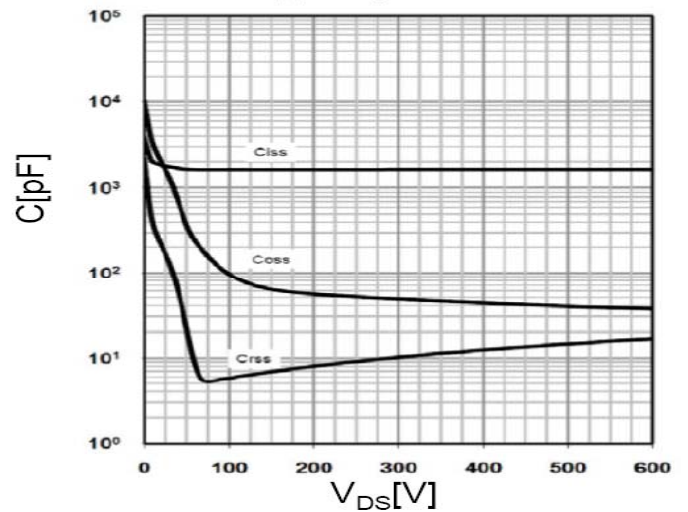


Capacitance




■ CHARACTERISTICS CURVE

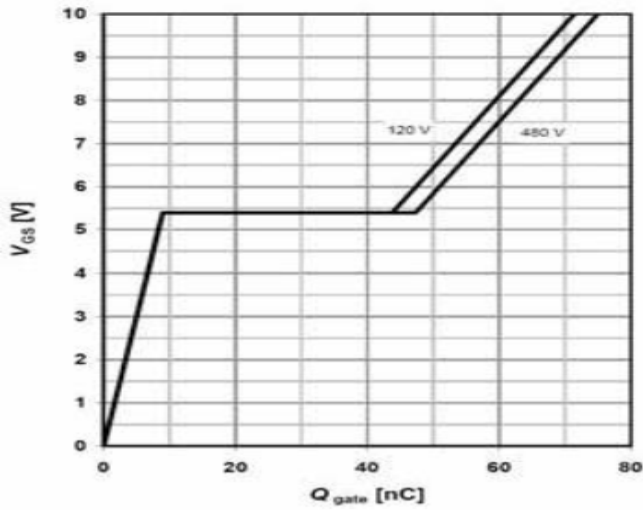

Gate Charge Waveform

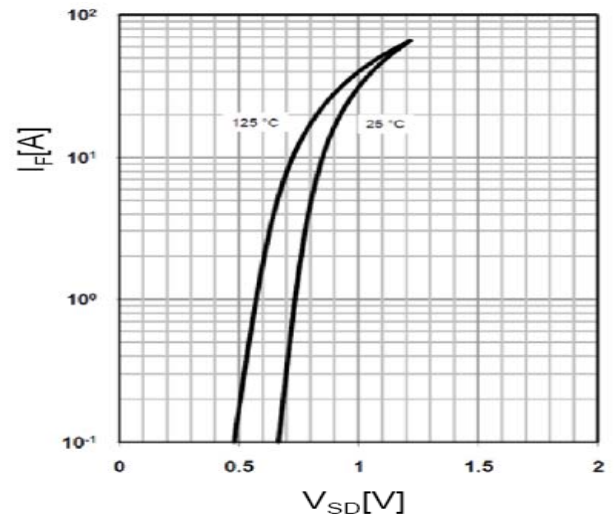

Source-Drain Diode Forward Voltage

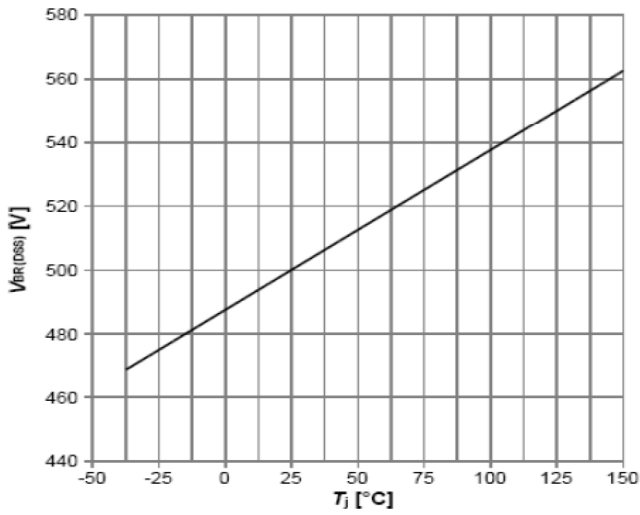

Breakdown Voltage Vs Junction Temperature

TO-247 MECHANICAL DATA

UNIT: mm

SYMBOL	MIN	NOM	MAX	SYMBOL	MIN	NOM	MAX
A	4.60		5.15	A1	1.30		1.60
b	2.86		3.26	b1	1.86		2.26
b2		1.20		C		0.50	
D	19.00		21.00	E	15.45		15.75
E1	12.00		13.06	e		5.45	
L	14.00		14.60	L1	5.20		5.88
L2	24.00		24.40	L3	10.00		10.60
P		3.50		Q	2.30		2.70

